


PFX10H/15H-NW

Your new Powr-Flite heated extractor is equipped with a built in heat exchanger that will produce hot water up to 190 degrees at 1750 watts. Put hot tap water in the solution tank, the water will flow through the pump and into the heat exchanger and then out to the wand. Be very careful when working around the spray tip on wand or hand tool when hot water is flowing.

Carpet cleaning solutions can be run through the heat exchanger but the whole system should be flushed once a month with a solution of 1 part water to 3 parts white vinegar in order to neutralize the alkaline left by the cleaning solution.

Your new heated unit is also outfitted with two power supply cords. The one marked with Red on the end is the power cord for the Heat exchanger. The other cord powers the vacuum motors and the pump. Each cord must be plugged into separate 115-volt outlets *that are wired to different circuits*; failure to do this will cause breakers to trip in the house or building you are cleaning in. The heater indicator light on the front of the unit will come on when the heater is turned on. If you are only using the extractor for water recovery you only need to plug in the one power cord for the vac motors and pump.

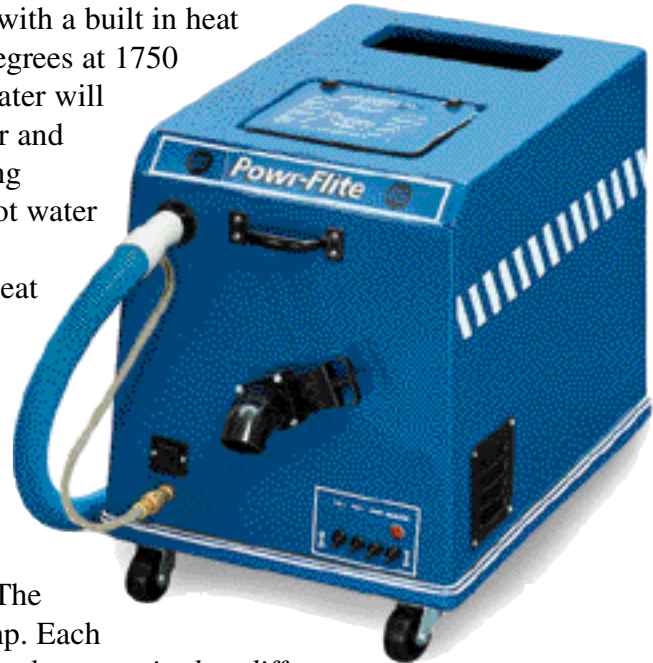

Your heat exchanger has one 1750 watt heat rod element in the middle of the cast heater that produces the heat. This heat rod can be removed and replaced if needed. Please call our Sales Dept. for replacement heat rods. Your heat exchanger carries a 3-year warranty, should you need warranty service please contact our customer service Dept. at 1-800-880-2913. The heater also has two thermal switches on it that cycle the heater on and off according to temperature rise. This ensures that your heater does not over heat the water or itself. The temperature setting is factory set within the switches. Do not service the heater when the unit is plugged in or hot to the touch. Let the heater cool down before any service is performed.

With proper care and maintenance your Powr-Flite heated extractor will offer years of service.

Heater Data

115-volt
1750 watts
190 degree
6.5 lbs